



ButlerBuilt® Dragster Advantage Lateral Head Support Measuring Procedure – PRO Stock / PRO Mod

Looking from the
left side of the car,
measure the
Front Angle
Can be Vertical or
even top forward in
some cases.

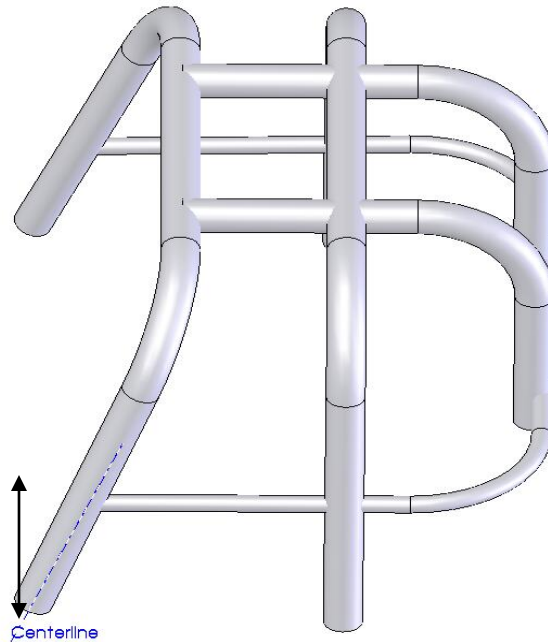

Right and Left
Angle
When looking
from the front of
the car.

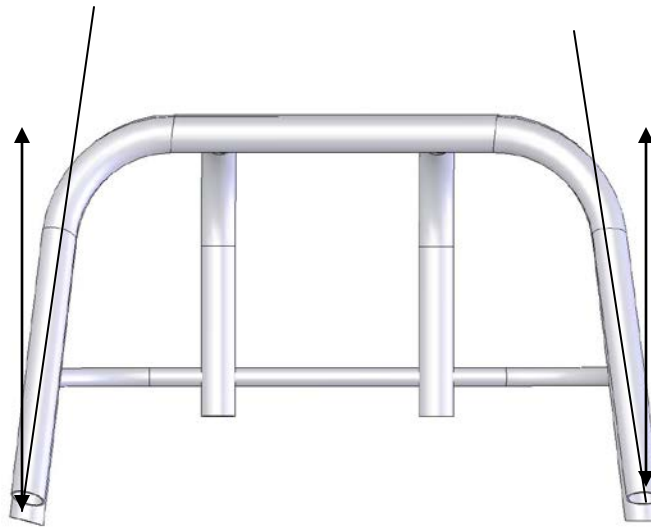


ButlerBuilt Motorsports Equipment
PO Box 1270
Harrisburg, NC 28075
70 Pitts School Rd NW
Concord, NC 28027
Phone: 800-621-SEAT (7328) Fax 704-784-1027
www.butlerbuilt.net


ButlerBuilt® Dragster Advantage Lateral Head Support Measuring Procedure – PRO Stock / PRO Mod

1. At eye level, the distance from the centerline of the front down tube back to the start of the rear radius. (See Picture 1 below)
2. Approximate the size of the rear radius. (Most likely 5.5 inches but this may vary.) (See Picture 1 below)
3. At eye level, the distance from right to left **inside** the bars of the roll cage. This will determine pad thickness. If there is taper built in the cage, both the front and rear dimensions are needed for this measurement. (See Picture 2 below)

Picture 1

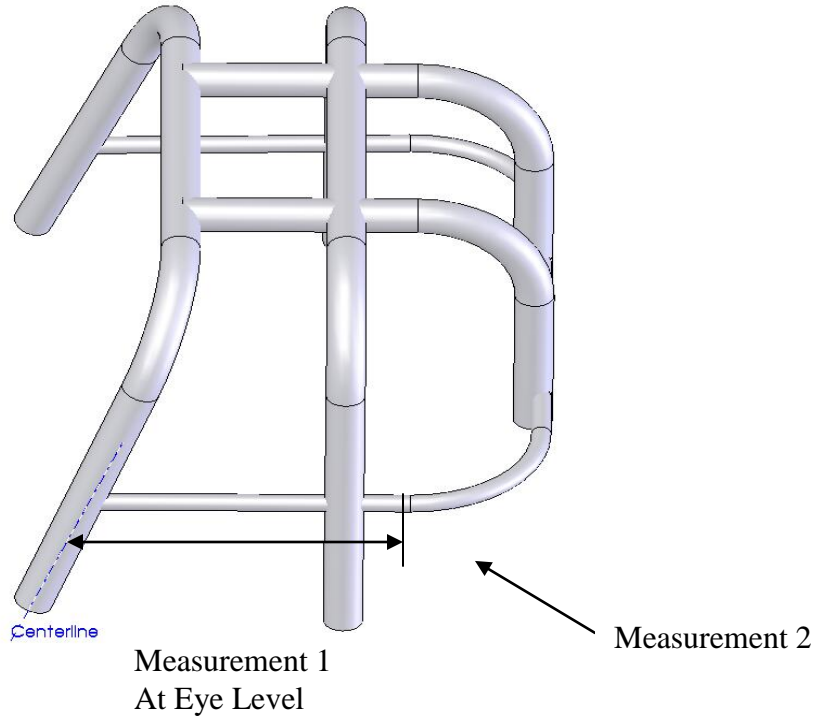

Picture 2

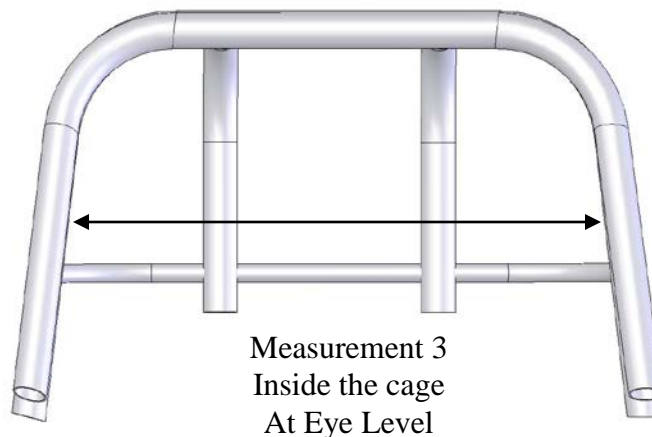

ButlerBuilt Motorsports Equipment
PO Box 1270
Harrisburg, NC 28075
70 Pitts School Rd NW
Concord, NC 28027
Phone: 800-621-SEAT (7328) Fax 704-784-1027
www.butlerbuilt.net